


HUSKY GLASS

HENDERSON

For top hung glass sliding doors. Max 75kg each leaf.

APPLICATION

- Ideal solution for light weight glass applications such as residential doors, office doors and small glass partitions
- Quiet operation, Aluminium track with nylon rollers
- Glass clamp eliminates the need for holes in glass
- Suitable for both toughened and laminated glass

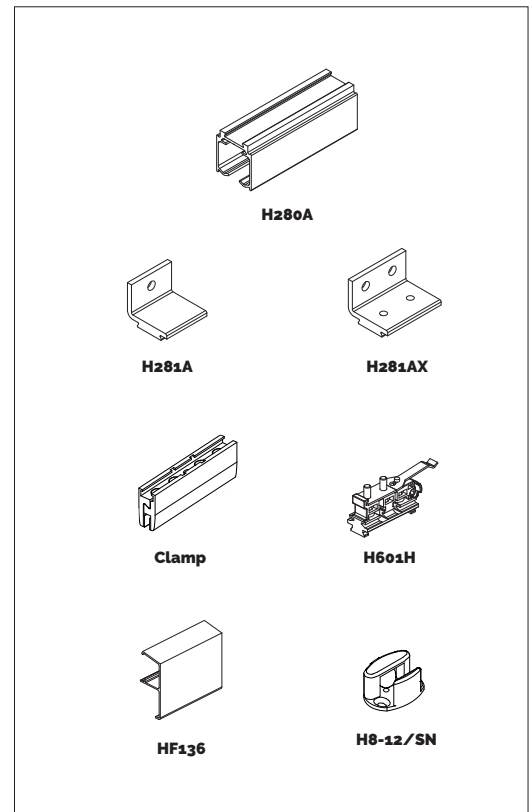

HARDWARE SPECIFICATION		
Tracks	H280A	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H280AN	Anodised aluminium (2000, 3000, 4000 & 6000mm lengths)
Brackets	H281A	Face fixed aluminium (for aluminium track)
	H281AX	End and jointing bracket aluminium (for aluminium track)
		Spacing 275mm centres (maximum)
Guide	H8-12/SN	Brushed stainless steel adjustable floor guide to suit 8, 10 or 12mm glass
Fascia	HF136	Fascia for soffit fixed applications
Accessories		
Handles	Refer to your Lockwood Catalogue for a full range of handles	

DOOR SPECIFICATION	
Track System	Husky Glass
For Individual Door Leaves:	
Max Door Weight	75kg
Max Door Width	1200mm
Door Thickness	8, 10, 12mm
Max Door Height	2400mm


STANDARD SETS AND PACK	
Sets comprise of 2 hangers, 2 glass clamps, 2 clip stops & 1 adjustable floor guide	
Clamp Set No.	Hardware for
H8/HY/75	75kg 8mm glass door
H10/HY/75	75kg 10mm glass door
H12/HY/75	75kg 12mm glass door

Glass Weight

Value is approximate based on
 8mm glass panel = 20kg/m²
 10mm glass panel = 25kg/m²
 12mm glass panel = 30kg/m²

HUSKY GLASS

**DRAWING IS
NOT TO SCALE**

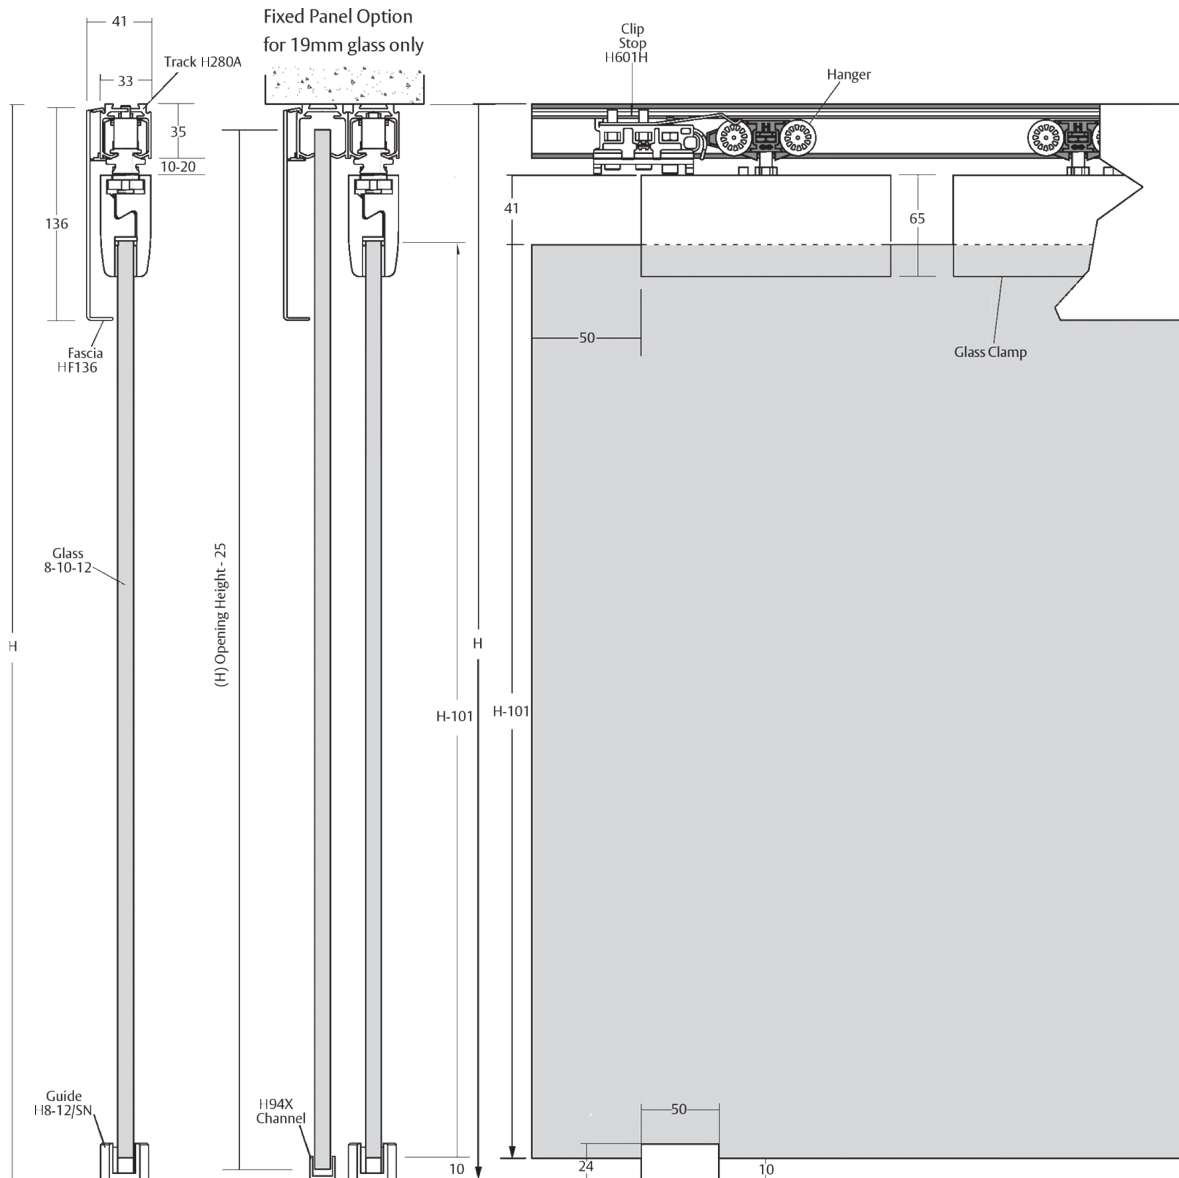

REFER TO HUSKY INSTRUCTIONS FOR GENERAL TRACK INSTALLATION DETAILS