

STRAIGHT SLIDING 301


HENDERSON

For timber or metal top hung sliding doors. Max 400 or 450kg

APPLICATION

- Designed for commercial, industrial and agricultural applications
- Designed to accommodate single or multiple panels on one or more tracks
- Versatile range of hanger, track, bracket and guide options, allows the 301 system to be used in a wide range of applications
- Where doors are fitted externally, a canopy is recommended
- Suitable for Fire Resistant applications

HARDWARE SPECIFICATION			
Track	H301 or H301H	Galvanised Steel (2000, 2500, 3000, 4000 & 6000mm lengths)	
		Fix spacing at 900mm centres (maximum)	
	HH3/301	In track door stop	
Brackets	Aluminium	Steel (Zinc plated)	
	H1A/301	H1/301S	Face fix, single track
	H3A/301	H3/301S	Soffit fix, single track
	H4A/301	H4/301S	Soffit fix (in line), single track
	-	H4R/301S	Soffit fix (adjustable), single track
	H5/301	H5R/301S	Face fix, double track
	H6/301	-	Soffit fix, double track
	H1A/301EC	-	Bracket end clip (insert into open bracket to form a closed version)
	For closed and jointing bracket option please contact our Technical Sales Team.		
Track Stop	HH3/301	Track mounted door stop	
Hangers (2 per door)*	Steel wheels	Nylon wheels	
	H52A/S	H52A/N	Timberdoors - angle plate fixing
	H53A/S	H53A/N	Timber doors - apron fixing
	H56A/S	H56A/N	Metal doors - angle frame
	H56AX/S	H56AX/N	Metal doors - box frame
	H57A/S	H57A/N	Timber/metal doors - concealed plate
	- All hangers suffixed 'N' have silent running nylon wheels and 'S' have steel wheels.		
	- Nylon wheeled hangers should not be used on installations involving temperatures exceeding 80°C		
	* Each panel must be rigid enough to be supported by only two hangers		
Guides	H31D	Wall guide, double	
	H31S	Wall guide, single	
	H102/97	Timber doors	
	H104P/97	Metal doors - angle frame	
	H104PX/97	Metal doors - box frame	
	H106R/97	Timber doors - concealed fixing	
	H126H	Ground stay roller	
	H128	Shoe guide All steel parts are electro zinc-plated.	
Channels	H97	Galvanised steel (2000, 3000, 4000 & 6000mm lengths) Pre-drilled for lugging into concret	
Rail	H299	Galvenised Steel (2000, 2500 & 3000 lengths)	

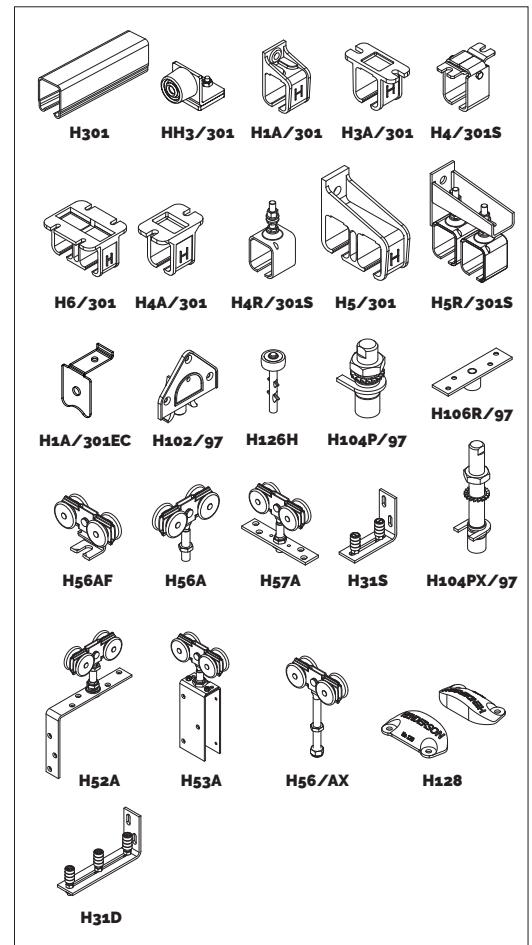

DOOR SPECIFICATION

Track System	301	301H
For Individual Doors:		
Max Door	400kg	450kg
Door Thickness	43-57mm*	43-57mm*
Max Door Height	3600mm	4200mm

*Max door thickness only applies to some face fix bracket and Hanger options.



STRAIGHT SLIDING 301

**DRAWING IS
NOT TO SCALE**

