

# SECUREFOLD PRO 100 (RADIUS MORTICE)


HENDERSON

**For top hung exterior folding timber doors.  
Max 100kg each leaf.**

**APPLICATION**

- Manufactured from high grade 316 stainless steel and cutting edge polymers with anodised aluminium track
- Ideal for coastal environments or areas requiring a high level of corrosion resistance
- Designed for external outward opening timber doors up to 100kg
- Ideal for residential or commercial applications
- Fantastic resistance to the weather. System can be customised to suit various applications

| HARDWARE SPECIFICATION |          |  |
|------------------------|----------|--|
| <b>Track</b>           | H250     | Anodised Aluminium (2000, 3000, 4000 & 6000mm lengths)<br>Soffit fix spacing 900mm centres (maximum) |
| <b>Hangers</b>         | HSFP2S   | End hanger set check in - Reversible handing (incl. hanger and guide)                                |
|                        | HSFRP2S  | End hanger set mortice wrap around - Reversible handing (incl. hanger and guide)                     |
|                        | HSFR4S   | Intermediate hanger set (includes hanger, guide and hinge)   |
|                        | HSFP8S   | Meeting door set - rebated (incl. 2 hangers and 2 guides)  |
| <b>Pivot Sets</b>      | HSFR1S   | Pivot set mortice wrap around (incl. top and bottom pivots)  |
|                        | HSFR9S   | Intermediate pivot hinge check in (optional for doors over 2200mm high)                              |
| <b>Hinge Sets</b>      | HSFR3S   | Hinge handle set (incl. 2 hinges and 1 hinge handle)   |
|                        | HSFR5S   | Hinge set - inward opening (incl. 3 hinges)  |
|                        | HSFR6S   | Offset hinge set - inward opening (incl. 3 offset hinges)  |
|                        | HSFR7S   | Offset hinge handle set - outward opening (incl. 2 offset hinges and 1 offset hinge handle)          |
| <b>Channels</b>        | H89SS    | Stainless steel (2000 & 3000mm length)   |
|                        | H94X     | Aluminium (2000, 3000, 4000 & 6000mm lengths)  |
|                        | H94P     | Polypropylene (2000, 3000, 4000 & 6000mm lengths)  |
|                        | H94PSC   | Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)                   |
| <b>Accessories</b>     |          |  |
| <b>Flushbolts</b>      | HSF190S  | 190mm non locking flushbolt  |
|                        | HSF190LS | 190mm locking flushbolt  |
|                        | HSF450S  | 450mm non locking flushbolt  |
|                        | HSF450LS | 450mm locking flushbolt  |
|                        | HSF600S  | 600mm non locking flushbolt  |
|                        | HSF600LS | 600mm locking flushbolt  |

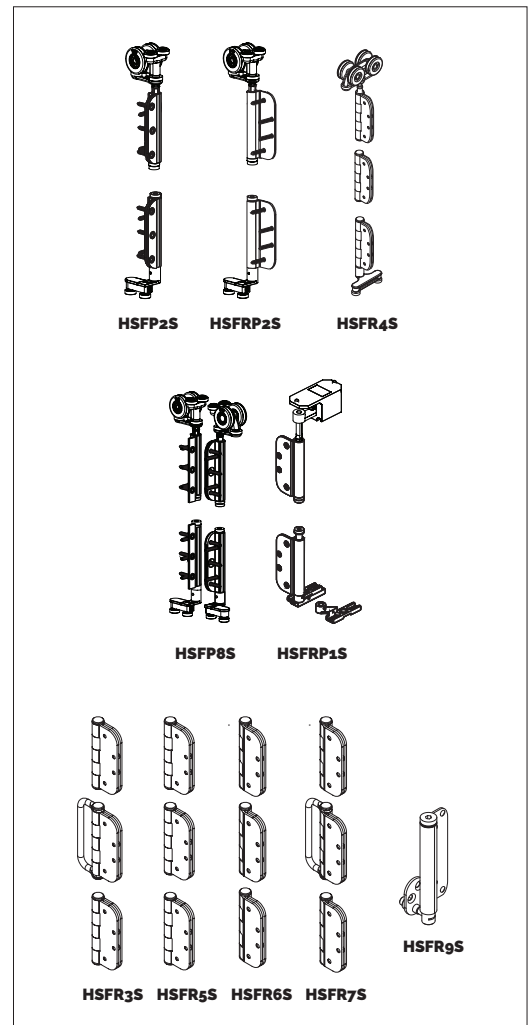

| DOOR SPECIFICATION   |                       |
|--|-----------------------|
| <b>Track System</b>  | <b>Securefold 100</b> |
| For Individual Door Leaves:  |                       |
| Max Panel Weight   | 100kg                 |
| Max Panel Width  | 1000mm                |
| Panel Thickness  | 35-68mm               |
| Max Panel Height   | 3300mm                |
| For doors between 35-68mm thick use an alternative to the standard flushbolt |                       |



# SECUREFOLD PRO 100 (RADIUS MORTICE)

**DRAWING IS  
NOT TO SCALE**

