

# SOLTAIRE 120


HENDERSON

## For top hung sliding doors. Max 120kg each.

### APPLICATION

- Manufactured from high grade 316 stainless steel with anodised aluminium track
- This reliable system is extremely durable and ideal for coastal applications, heavy use or areas requiring a high level of corrosion resistance
- Designed for interior and exterior doors up to 120kg
- Ideal for residential or commercial applications
- Designed to accommodate single or multiple panels on one or more tracks
- Hangers available for MDF, timber or metal doors
- The track can be soffit fixed or face fixed to give flexibility of installation
- Optional telescopic kit links passing panels allowing them to traverse simultaneously

HARDWARE SPECIFICATION		
<b>Track</b>	H120N	Track no brush. Anodised Aluminium (2, 3, 4, 6mtr lengths)
	H120A	Track for brush strip anodised Aluminium (2, 3, 4, 6mtr lengths). Soffit fix spacing 600mm centres (maximum)
<b>Brush Strips</b>	HBS10, HBS15 HBS20, HBS25	Available in black in 4 brush heights, by the metre
<b>Brackets</b>	H1/SS H5/SS	Face fixed stainless steel Double run face fixed stainless steel. Starting 20mm from end of track fix at 600mm maximum centres.
<b>Hangers (2 per door)*</b>	H51/120/SS	Timber Doors – top fix – surface mounted
	H52/120/SS	MDF Doors – face fixing
	H56/120/SS	Metal Doors – angle frame fixing
	H57/120/SS	Timber Doors – concealed plate fixing
* Each panel must be rigid enough to be supported by only two hangers		
<b>Track Stop</b>	HH4/AN	Anodised aluminium with rubber buffer
<b>Guides</b>	H101NDP	Nylon saw cut guide
	H102SS/94	Timber doors - wall mounted and multiple run guide
	H104P/89	Metal door - angle frame (Zinc plated steel, Brass Roller)
	H104PX/89	Metal door - box section (Zinc plated steel, Brass Roller)
	H105SS/94	Timber doors - face mounted guide
	H106SS/94	Timber doors - concealed fixing with SS bearing
<b>Channels</b>	H89SS	Stainless steel (2000 & 3000mm length)
	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94P	Polypropylene (2000, 3000, 4000 & 6000mm lengths)
	H94PSC	Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)
<b>Accessories</b>		
<b>Interlocking Seal</b>	H59BZ/4800	Bronze anodised (4800mm to suit typical 2400mm door height)
	H59CA/4800	Clear anodised (4800mm to suit typical 2400mm door height) Drilled and countersunk. Includes brush seal.

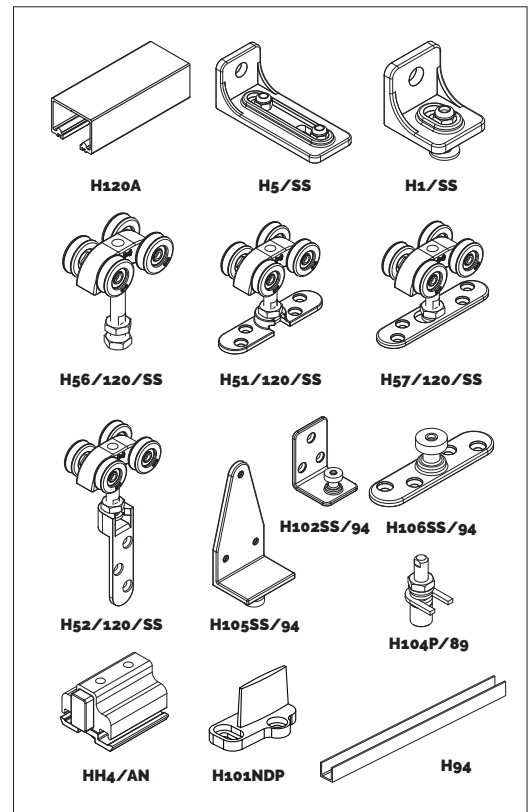

DOOR SPECIFICATION	
<b>Track System</b>	<b>Soltaire120</b>
For Individual Doors:	
Max Door Weight	120kg
Door Thickness	19-48mm*
Max Panel Height	3000mm
*Max door thickness only applies to some face fix bracket options.	



# SOLTAIRE 120

**DRAWING IS  
NOT TO SCALE**

