


# MARATHON 55 & 90

# HENDERSON

## For sliding doors. Max 55kg or 90kg.

### APPLICATION

- Used for heavy-duty domestic and light commercial applications, doors and partitions
- For timber, timber framed or composite doors
- Easily adjusted door height
- Simultaneous action option
- Fire door kit option available for Marathon 90

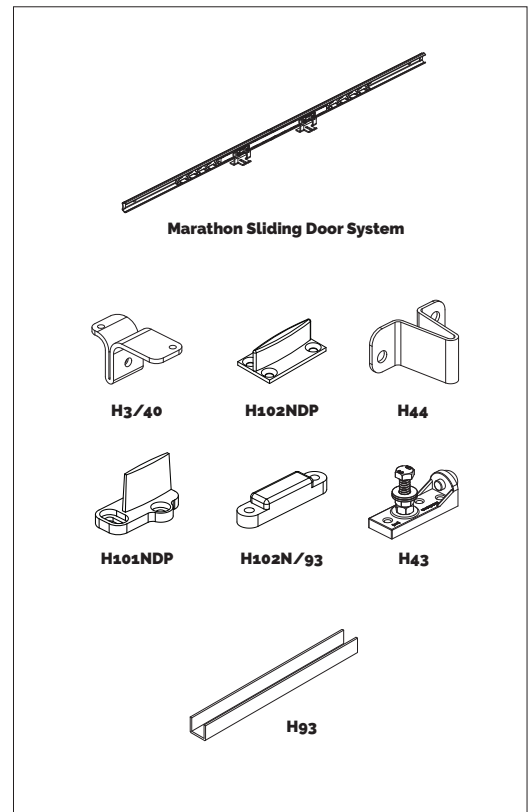

HARDWARE SPECIFICATION		
<b>Top plate (2 per door)</b>	H43	Nylon top plate with integral buffer (not supplied with bolt)
<b>Stop</b>	H44	Wall mounted stop
<b>Guides</b>	H101NDP	Nylon saw cut guide
	H102NDP	Nylon saw cut guide
	H102N/93	Floor mounted channel guide
<b>Channels</b>	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
<b>Self Closing Kit</b>		
<b>Accessories</b>	H5CK1	Self closing kit, for doors up to 60kg
<b>Bracket</b>	H3/40	Soffit fix brackets (pack of 5)
<b>Fire door kit</b>	HFDK1	Self closing fire door kit. For use in conjunction with Marathon kits S3, S4, S5 & S6 (purchased separately)
	HFDK2	Non-self closing fire door kit. For use in conjunction with Marathon kits S3, S4, S5 & S6 (purchased separately)
<b>Simultaneous Action Kit</b>	H23	For biparting doors up to 60kg

DOOR SPECIFICATION			
Track System	Marathon 55	Marathon 90	
For Individual Doors:			
Max Door Weight	55kg	90kg	
Max Door Width	1500mm	1500mm	
Door Thickness	32-50mm	32-50mm	
Max Door Height	3000mm	3000mm	

STANDARD SETS AND PACK				
Sets comprise of top assembly, nylon top plates, floor guide, nylon, channel, wall mounted stop, all screws and fitting instructions.				
Marathon 55	Marathon 90			
Set No.	Set No.	Opening width	Track Length	Hardware for
HJ2	HS2	400-750mm	1219mm	1 door
HJ3	HS3	750-900mm	1473mm	1 door
HJ4	HS4	900-1050mm	1702mm	1 door
HJ5	HS5	1050-1200mm	1981mm	1 door
HJ6	HS6	1200-1500mm	2438mm	1 door

# MARATHON 55 & 90

**DRAWING IS  
NOT TO SCALE**

