


# HUSKY 25 & 40

HENDERSON

## For folding doors and room dividers. Max 25kg or 40kg.

### APPLICATION

- Ideally suited for light to medium weight residential folding partitions
- Concealed fixing
- Suitable for timber, timber framed and composite doors

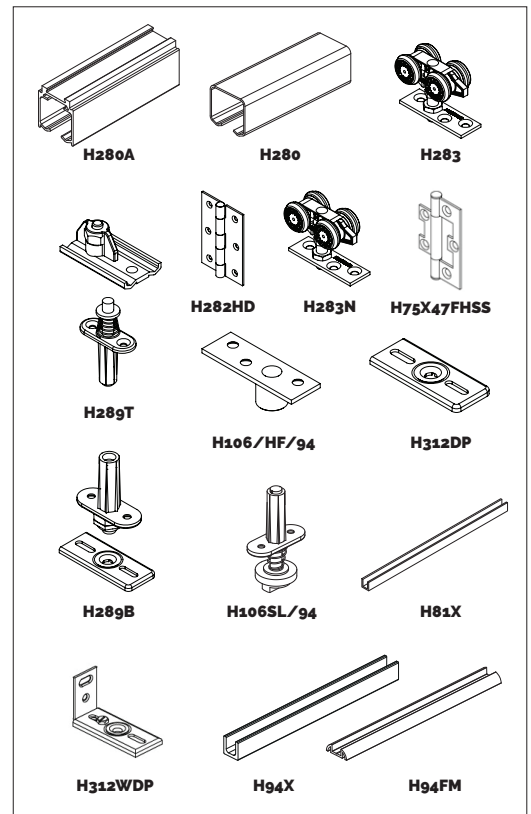

HARDWARE SPECIFICATION		
<b>Track</b>	H280	Steel (2000, 3000, 4000 & 6000mm lengths)
	H280A	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H280AN	Anodised (2000, 3000, 4000 & 6000mm lengths)
		Soffit fix spacing 275mm centres (maximum)
<b>Pivots</b>	H289T	Top pivot assembly
	H289B	Bottom pivot assembly
<b>Hangers (2 per door)</b>	H283N	Nylon bodied, 4-wheel adjustable hanger (Husky 25)
	H283	Nylon bodied, needle roller bearing hanger (Husky 40)
	H312DP	Bottom socket
	H312WDP	Bottom socket wall mount (optional, not supplied in sets)
	H313DP	Top pivot
	H314DP	Bottom pivot
<b>Hinge</b>	H282HD	Husky butt hinge
	H75X47FHSS	Stainless steel flush hinge
	H90X50FHSS	Stainless steel flush hinge
<b>Guides</b>	H106/HF/94	Roller guide
	H106SL/94	Spring loaded guide
<b>Channels</b>	H81X	Aluminium channel (2400 & 3600mm lengths)
	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94FM	Aluminium (2000, 3000, 4000 & 6000mm lengths)

DOOR SPECIFICATION		
Track System	Husky 25	Husky 40
For Individual Doors:		
Max Door Weight	25kg	40kg
Max Door Width	600mm	750mm
Door Thickness	20-40mm	20-40mm
Max Door Height	2400mm	2400mm

STANDARD SETS AND PACK			
Sets comprise of steel track, hangers, top and bottom pivots, guides (Husky 40), hinges, all screws & fitting instructions.			
Husky 25	Husky 40		
Set No.	Set No.	Track Length	Hardware for
HF25/12	-	1200mm	2 doors
HF25/24	-	2400mm	4 doors (all 4 doors to one side)
-	HF40/15	1500mm	2 doors
-	HF40/30	3000mm	4 doors (all 4 doors to one side)
Pack No.		Application	
HF2/25		Two door fittings pack 25kg.	
-	HF2/40	Two door fittings pack 40kg.	
HF4/25		Four door, one end fittings pack 25kg.	
-	HF4/40	Four door, one end fittings pack 40kg.	

# HUSKY 25 & 40

**DRAWING IS  
NOT TO SCALE**

